

(19) World Intellectual Property
Organization
International Bureau



553/56

(43) International Publication Date
28 October 2004 (28.10.2004)

PCT


(10) International Publication Number
WO 2004/093278 A2

- (51) International Patent Classification⁷: **H02G**
(21) International Application Number:
PCT/US2004/011653
(22) International Filing Date: 9 April 2004 (09.04.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/462,280 11 April 2003 (11.04.2003) US
(71) Applicant (for all designated States except US):
WALKER SYSTEMS, INC. [US/US]; 1000 Innova-
tion Drive, Williamstown, WV 26187 (US).
(72) Inventor; and
(75) Inventor/Applicant (for US only): HALTERMAN, Fred-
erick, J. [US/US]; 716 30th Street, Apartment 8, Parkers-
burg, WV 26101 (US).

- (74) Agent: VANDER, LEEST, Kirk, A.; McAndrews, Held
& Malloy, Ltd., 500 West Madison Street, 34th Floor,
Chicago, IL 60661 (US).
(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: COVER ASSEMBLIES FOR IN-FLOOR FITTINGS

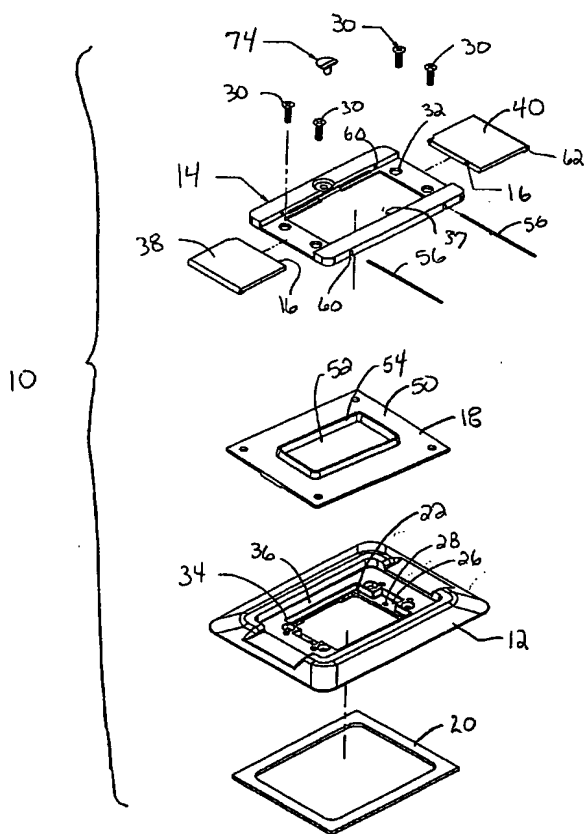

(57) Abstract: According to certain aspects of an embodiment of the invention, a cover assembly for an in-floor fitting includes a trim flange, an access door mounting member, first and second access doors, and a plurality of seal members. The trim flange is connectable to the fitting and has an opening that overlies the fitting and provides access to the interior of the fitting. At least receptacle is supported by one of the fitting and the trim flange. The access door mounting member is connectable to the trim flange, and includes an opening that overlies the opening in the trim flange. The first and second access doors are connected to the mounting member for movement between closed positions at which the access doors are adjacent one another and overlie the at least one receptacle and open positions at which the access doors are spaced from one another and the at least one receptacle is exposed. A first seal member seals against moisture infiltration between the access doors when the access doors are at their closed positions. A second seal member is interposed between the mounting member and the trim flange to seal against water infiltration between these components. A third seal member is interposed between the trim flange and a floor surface to seal against water infiltration between the trim flange and the floor surface.

WO 2004/093278 A2



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*